




Quectel BG770S-GL

Ultra-compact LTE Cat M1/ NB2 Module

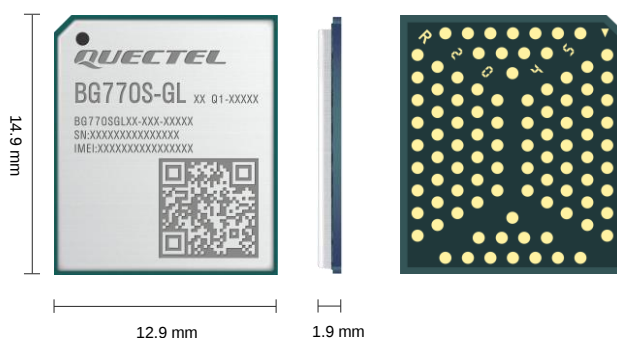

BG770S-GL, a 5G-ready ultra-compact LPWA module, is compliant with 3GPP Rel-14, which is to support 3GPP Rel-15–17 easily by software upgrade. The module supports LTE Cat M1/ NB2 bands, SRD* (Short Range Device) communication in Sub-1 GHz and 2.4 GHz bands. Besides, it features ultra-low power consumption implemented by Altair ALT1350 processor and integrated RAM and flash, which help reduce the current consumption to rather low levels in various modes, including PSM, eDRX, etc. It is further integrated with a GNSS engine that supports GPS and GLONASS* satellite systems.

The BG770S-GL is an industrial-grade module for industrial and commercial applications only.

With an ultra-compact SMT form factor of 14.9 mm × 12.9 mm × 1.9 mm and a high integration level, the module enables integrators and developers to design applications easily leveraging its low power consumption and compact structure design. The BG770S-GL's advanced LGA package allows for fully automated manufacturing necessary for large-scale applications.

A rich set of Internet protocols, industry-standard interfaces and abundant functionalities extend the applicability of the module to a wide range of M2M applications, such as wireless POS, smart metering, tracking, wearable devices, and many more.



Key Features

- ✓ Extremely compact LTE Cat M1/ NB2 module with ultra-low power consumption
- ✓ SRD* (Short Range Device) radio with mesh capabilities
- ✓ Integrated RAM and flash
- ✓ Super slim profile in LGA package
- ✓ Embedded with abundant Internet service protocols
- ✓ Supports DFOTA
- ✓ A rich set of external interfaces (including RF control interfaces) that ensure convenient applications
- ✓ Fast time-to-market: reference designs, evaluation tools and timely technical support minimizing time and efforts in design and development
- ✓ Robust mounting and interfaces



LTE Cat M1 &
Cat NB2



DFOTA



Super Compact Size



Abundant Protocols
Embedded



Quectel Enhanced
AT Commands



Integrated RAM and
Flash



Ultra-low Power
Consumption

Quectel BG770S-GL

LTE Cat M1/ NB2 Module BG770S-GL	
Region/ Operator	Global
Dimensions (mm)	14.9 × 12.9 × 1.9
Package	LGA
Weight (g)	Approx. 0.8
Temperature Range	
Operating Temperature	-35 °C to +75 °C
Extended Temperature	-40 °C to +85 °C
Frequency Bands	
LTE-FDD	Cat M1: B1/ 2/ 3/ 4/ 5/ 8/ 12/ 13/ 18/ 19/ 20/ 25/ 26/ 27/ 28/ 66/ 85 Cat NB2: B1/ 2/ 3/ 4/ 5/ 8/ 12/ 13/ 17/ 18/ 19/ 20/ 25/ 26/ 28/ 66/ 85
Data Rate (Max.)	
LTE (kbps)	3GPP Rel-14 Cat M1: 588 (DL)/ 1119 (UL) Cat NB2: 127 (DL)/ 158 (UL)
Certifications	
Carrier	Europe: Vodafone*/ Deutsche Telekom* America: Verizon*/ AT&T*/ T-Mobile* Canada: Rogers*/ Telus* South Korea: KT*/ LGU+* Japan: NTT DOCOMO*/ KDDI* Australia: Telstra*
Regulatory/ Conformance	Global: GCF Europe: CE North America: PTCRB America: FCC Canada: IC South Korea: KC* Japan: JATE/ TELEC Australia/ New Zealand: RCM
Others	RoHS
Interfaces	
UART	× 2
ADC	× 2
USIM	× 1 (Supports 1.8 V only)
GPIO	× 13
GRFC	× 2
NET_STATUS	× 1 (Indicate the module's network activity status)
STATUS	× 1 (Indicate the module's operation status)
Antenna	× 2 (Main Antenna: × 1; GNSS Antenna: × 1)
SMS	
Short Message Service	Point-to-Point MO and MT SMS cell broadcast Text and PDU mode SMS storage: ME by default
Enhanced Features	
GNSS	GPS/ GLONASS*
DFOTA	Supported
SRD*	Supported
Software Features	
3GPP	3GPP E-UTRA Release 14 3GPP TS 27.007 3GPP TS 27.005 Quectel Enhanced AT Commands
AT Commands	
Protocols	TCP/ PPP/ UDP/ SSL/ MQTT/ FTP(S)/ HTTP(S)/ LwM2M*/ IPv4/ IPv6/ TLS/ DTLS/ PING/ CoAP/ NITZ
Firmware Upgrade	UART/ DFOTA
Electrical Features	
Output Power (Max.)	23 dBm ±2 dB
Supply Voltage Range	VBAT_BB: 2.2~4.35 V, typ. 3.3 V VBAT_RF: 3.1~4.3 V, typ. 3.3 V
Power Consumption (Typical)	Power Saving Mode: 1.31 µA Rock Bottom: 4.8 µA @ AT+CFUN=0, AT+QSClk=2 1.9 µA @ AT+CFUN=0, AT+QSClk=3 Idle Mode: Cat M1 8.88 mA @ Cat M1, DRX = 1.28 s 8.87 mA @ e-I-DRX = 81.92 s; PTW = 2.56 s; DRX = 1.28 s Cat NB1 9.16 mA @ Cat NB1, DRX = 1.28 s 9.02 mA @ e-I-DRX = 81.92 s; PTW = 2.56 s; DRX = 1.28 s Sleep Mode @ AT+QSClk=2: Cat M1: 0.31 mA @ DRX = 1.28 s 15.06 µA @ e-I-DRX = 40.96 s; PTW = 1.28 s; DRX = 1.28 s 10.00 µA @ e-I-DRX = 81.92 s; PTW = 1.28 s; DRX = 1.28 s Cat NB1: 0.55 mA @ DRX = 1.28 s 34.83 µA @ e-I-DRX = 40.96 s; PTW = 2.56 s; DRX = 1.28 s Sleep Mode @ AT+QSClk=3: Cat M1: 0.31 mA @ DRX = 1.28 s 12.02 µA @ e-I-DRX = 40.96 s; PTW = 1.28 s; DRX = 1.28 s 7.13 µA @ e-I-DRX = 81.92 s; PTW = 1.28 s; DRX = 1.28 s Cat NB1: 0.55 mA @ DRX = 1.28 s 32.64 µA @ e-I-DRX = 40.96 s; PTW = 2.56 s; DRX = 1.28 s Active Mode (GNSS disabled): Cat M1: 151 mA @ 23 dBm Cat NB1: 159 mA @ 23 dBm

Note:
*: Under development/planning/in progress.